


## EXTERNAL DEVICES CONNECTION



## PRECAUTIONS

- Amplifier produces high volume levels. Staying in places of high volume levels could cause permanent hearing loss.
- Do not use the amplifier in humid and dusty places.
- Do not operate the amplifier through the unearthed socket.
- Do not leave the amplifier in the vicinity of children.
- Do not use the amplifier with broken power outlet or improper power cord.
- Do not install nor use the amplifier near any heat sources, in case of overheating the amplifier turns off and will return to work after cooling the unit. Do not cover the vent holes!
- In order to ensure proper air circulation, do not block any of the ventilation openings.
- Never put any liquid containers near the amplifier.
- In case of any objects or liquid access inside the amplifier, urgently switch the apparatus off and unplug the power supply cord.
- Protect the amplifier from any strikes.
- ATTENTION: To reduce the risk of electrical shock, do not remove the back cover of the amplifier. Inside parts can be repaired only by qualified service personnel.
- WARNING: To prevent the risk of electrical shock do not expose this appliance to moisture, rain or any liquid.

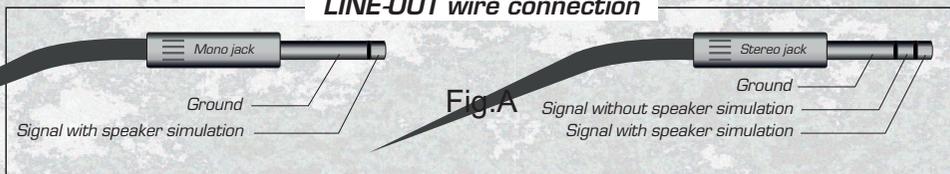

Box Electronics ul Cieszyńskiego 4, 81-88 Sopot Poland  
tel +48 58 550 66 46 tel/fax +48 58 551 90 05  
e-mail info@taurus-amp.pl www.taurus-amp.pl

RoHS



### Disposal of old Electrical & Electronic Equipment (Applicable throughout the European Union and other European countries with separate collection programs)

This symbol, found on your product or on its packaging, indicates that this product should not be treated as household waste when you wish to dispose of it. Instead, it should be handed over to an applicable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences to the environment and human health, which could otherwise be caused by inappropriate disposal of this product. The recycling of materials will help to conserve natural resources. For more detailed information about the recycling of this product, please contact your local city office, household waste disposal service or the retail store where you purchased this product.

# Amplification Taurus

## GUITAR AMPLIFIERS MANUAL

### Stomp-Head<sup>2</sup>



## DESIGNED BY MUSICIANS FOR MUSICIANS

**The Stomp-Head 1.Vintage** is dedicated to supporters of single-purpose amplifiers and prefer a vintage like type of sound.

The amp is based on a **MTD (Master Tube Design) technology**. It is our own groundbreaking technology which permits us to create powerful guitar amplifiers in very compact shapes. This technology uses all the significant features of tubes which determine the warm, classic sound of guitar amps. We offer players an amplifier with extremely light weight, very compact dimensions and powerful sound. The sound characteristics and power of the amplifiers based on our MTD technology are equal to the classic tube amps with the same power rating.

To obtain required parameters, the amplifier is driven by a much higher rated power amp. Even though the power of the amplifier is set at 50Watts RMS, in reality the real power of the amp is 100 Watts. The SH 1.VT is also equipped with a power selector allowing the player to use the amp in two different power ratings of 50 and 25 Watts RMS. It is also designed to auto adjust itself to different speaker impedance. The amp handles the speakers with 4, 8, and 16 Ohm of impedance.


The Stomp-Head 2.VT features a classic, three point EQ ( BASS, MIDDLE, TREBLE), PRESENCE, DRIVE and REVERB. The amplifier is characterized by very smooth, warm sound with soft compression and long sustain.

The Stomp-Head can also be used as a guitar preamp. LINE OUT with a Speaker Cabinet Simulation permits the player to connect independently the preamps to a mixer or an external power amp. The Speaker Cabinet Simulation imitates the sound of the CELESTION Vintage 30 cabinet. The amp is also equipped with a serial EFFECT LOOP.

## SPECIFICATIONS

- Power output: 50 W / 4-8-16ohm
- Power brake to 25Watt
- Auto detection speakers impedance
- Tubes: 12AX7
- 1 channel
- FOOT SWITCHES - MUTE and REVERB
- Controls:
- BASS, MIDDLE, TREBLE, PRESENCE, DRIVE, REVERB, VOLUME
- Serial effect loop
- LINE OUTPUT with speaker simulation
- Universal AC input range 90-260V/AC 50-60Hz
- Dimensions: [H x W x D] 90 x 160 x 190 mm
- Weight: 1,3kg

## FRONT PANEL

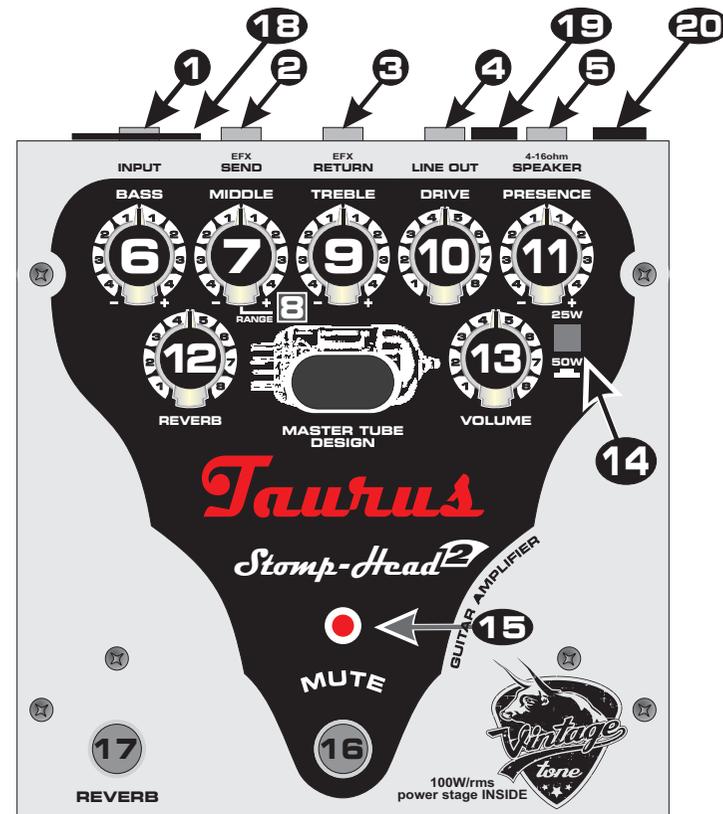

- [1] - INPUT
- [2] - Effect-loop SEND
- [3] - Effect-loop RETURN / PA input
- [4] - LINE OUTPUT with speaker cabinet simulation  
Signal can be lead in different ways: with simulation, without simulation or both - see Fig.A.
- [5] - Speakers output / impedance: 4-8-16ohm [auto detect. impedance]
- [6] - BASS control
- [7] - MIDDLE control
- [8] - REVERB control.
- [9] - TREBLE control
- [10] - DRIVE control
- [11] - PRESENCE control
- [12] - REVERB control.
- [13] - VOLUME control
- [14] - Power selector: 50Watt/25Watt
- [15] - LED indicator of the selected channel
- [16] - MUTE foot-switch
- [17] - REVER foot-switch
- [18] - AC POWER input. Range: 90-260V / 50-60Hz
- [19] - FUSE 2A
- [20] - POWER on/off switch