


# Amplification Taurus


## T-450

### FRONT PANEL

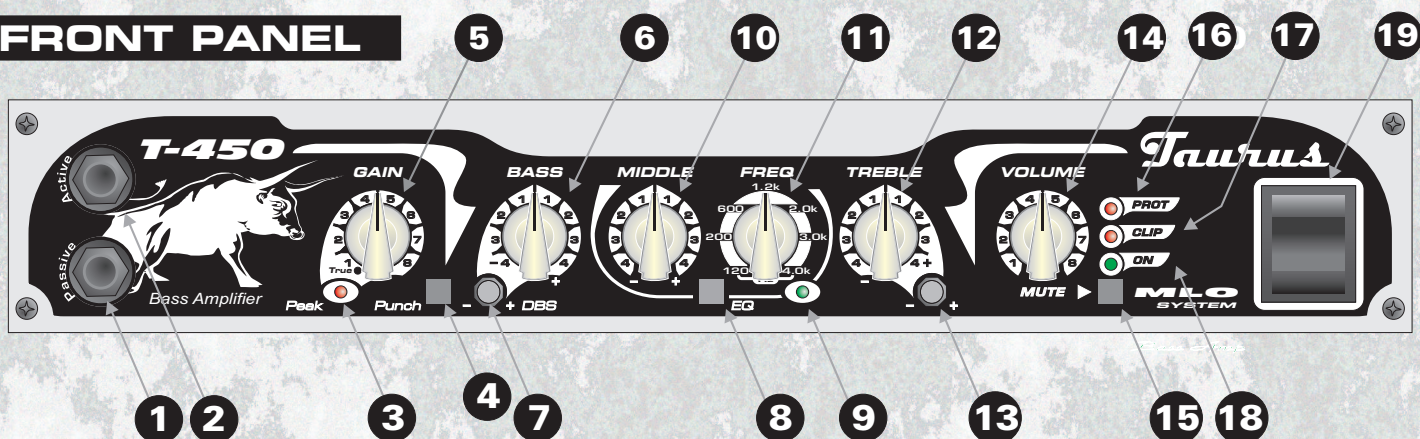

1. Active bass instrument INPUT [JACK 6.3mm].
2. Passive bass instrument INPUT [JACK 6.3mm].
3. PEAK indicator in preamp section.
4. PUNCH button - increases sonic expression.
5. GAIN control - True/Boost. "True" position (MIN) means that the instrument signal is not increased at input stage. The signal is the same as the pickup and preamp output.
6. BASS control with MLO-system.
7. Triple BASS - switch to reduce or boost low frequency [DBS-cut/OFF/DBS-boost].
8. PARAMETRIC EQ on/off switch.
9. PARAMETRIC EQ indicator.
10. PARAMETRIC EQ level control.
11. PARAMETRIC EQ frequency adjustment (120Hz...4kHz).
12. TREBLE CONTROL with MLO-system.
13. Triple TREBLE - switch to reduce or boost high frequency [CUT/OFF/PRESENCE].
14. VOLUME control.
15. MUTE on/off switch.
16. Protection indicator.
17. Power amplifier CLIP indicator.
18. ON/MUTE indicator.

### REAR PANEL

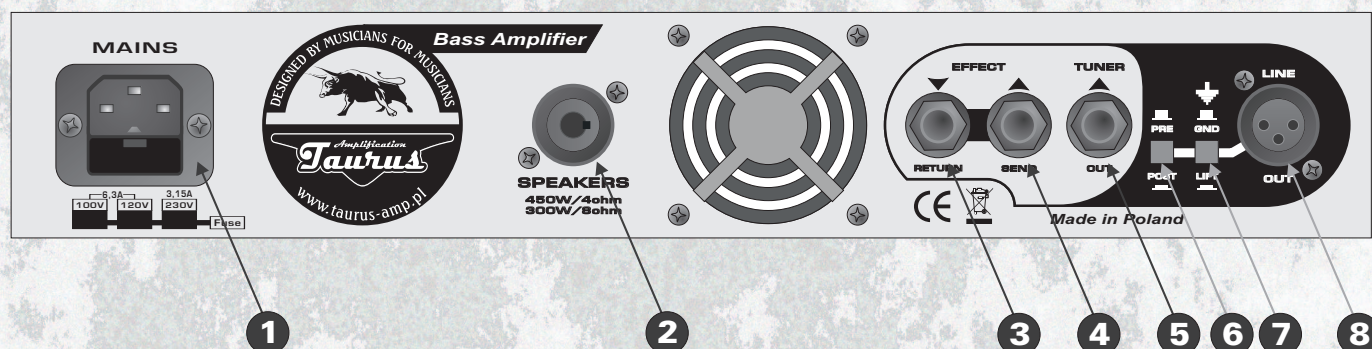

- [1] - EC POWER INPUT socket with AC fuse.
- [2] - SPEAKERS output [combo SPEAKON and 6,3mm JACK].
- [3] - AUX SEND output [6,3mm JACK].
- [4] - AUX RETURN input [6,3mm JACK].
- [5] - TUNER OUTPUT [6,3mm JACK].
- [6] - Balanced LINE OUTPUT [XLR].
- [7] - LINE OUTPUT PRE/POST EQ switch.
- [8] - LINE OUTPUT GROUND LIFT switch.