





silver line
THD-450T

FRONT PANEL

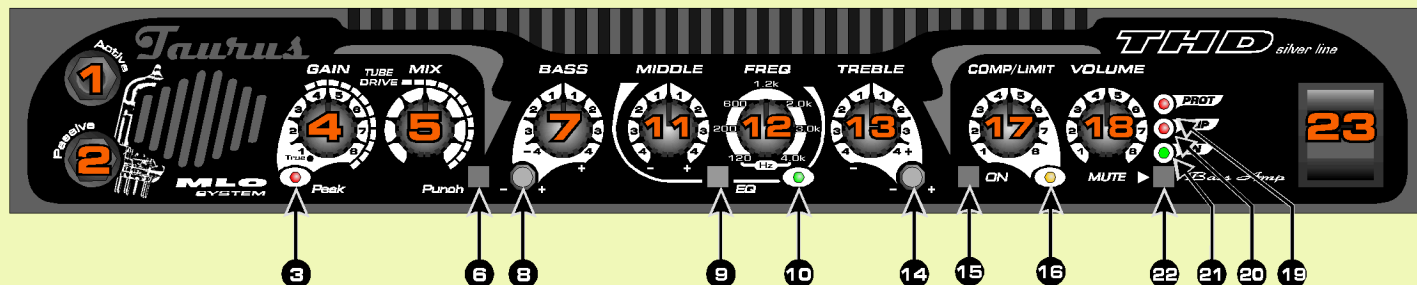

- [1] - Active bass instrument INPUT [JACK 6.3mm].
- [2] - Passive bass instrument INPUT [JACK 6.3mm].
- [3] - PEAK indicator in preamp section.
- [4] - GAIN control
- [5] - INPUT MIX - fluent signal adjustment of the input between 2 sections of the amplifier - transistor and tube
- [6] - PUNCH button - increases sonic expression.
- [7] - BASS control with MLO-system.
- [8] - Triple BASS switch to reduce or boost low frequency [DBS-cut/OFF/DBS-boost].
- [9] - PARAMETRIC EQ on/off switch.
- [10] - PARAMETRIC EQ indicator.
- [11] - PARAMETRIC EQ level control.
- [12] - PARAMETRIC EQ frequency adjustment [120Hz...4kHz].
- [13] - TREBLE CONTROL with MLO-system.
- [14] - Triple TREBLE switch to reduce or boost high frequency [CUT/OFF/PRESENCE].
- [15] - LIMITER-COMPRESSOR on/off switch.
- [16] - LIMITER indicator.
- [17] - COMPRESSION level adjustment.
- [18] - VOLUME control.
- [19] - PROTECTION indicator.
- [20] - Power amplifier CLIP indicator.
- [21] - ON/MUTE indicator.
- [22] - MUTE on/off switch.
- [23] - POWER on/off switch.

REAR PANEL

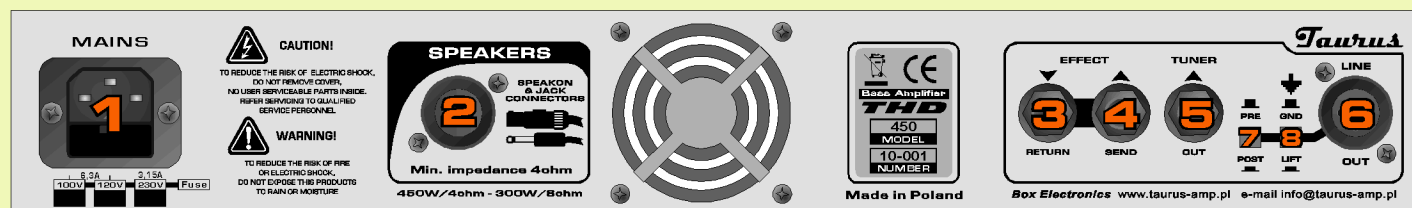

- [1] - EC POWER INPUT socket with AC fuse.
- [2] - SPEAKERS output [combo SPEAKON and 6,3mm JACK].
- [3] - AUX SEND output [6,3mm JACK].
- [4] - AUX RETURN input [6,3mm JACK].
- [5] - TUNER OUTPUT [6,3mm JACK].
- [6] - Balanced LINE OUTPUT [XLR].
- [7] - LINE OUTPUT PRE/POST EQ switch.
- [8] - LINE OUTPUT GROUND LIFT switch.